


SEW150

100% Polyester

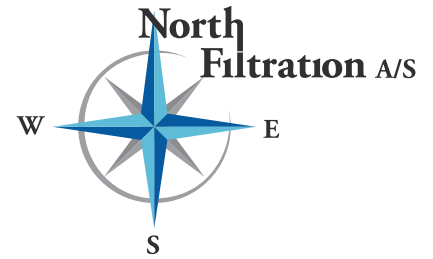

White Weiss	2,0/2,2 Decitex	0,56 mm	0,09 %	240 gram	MD 512,4 N/5cm Length CD 518,3N/5cm cross

FILTER MEDIA DATA

SEW 150 is a 100% spun bond filters media that is manufactures from continuous fibre who does not permit the particles to become embedded.

SEW 150 is very rugged and have a high burst strength that make it resistant to abrasion water, heat and chemicals.

100 % Spun bond media makes pulse cleaning easier and are running with lower pressure drop SEW 150 is a washable filter media.



Dry
Trocken **120 Celsius**

Wet
Feuchte **90 Celsius**

Air Permeability | 200Pa
Luftdurchlässigkeit | 200Pa **490 m3/m2/hr**

Chemical Resistance | Chemische Eigenschaften

	Excellent Sehr Gur	Good Gut	Fair Mässig
Oil/water resistance Öl und Wasserabweisend	X	X	X
Hydrolysis resistance Hydrolysebeständigkeit	X	X	X
Acid resistance Säurebeständigkeit	X	X	X
Alkaline resistance Alkalienbeständigkeit	X	X	X



Certificate No.
201120248
6210

Phone +45 5460 2080

S.E.W. North Filtration A/S * Vesterbrogade1, Section C * DK-4930 Maribo
E-mail: sales@northfiltration.com * www.northfiltration.com * VAT no.: DK 33 49 28 71