


SEW152 Antistatic


100% Polyester ALU Coated




Gray
Grau

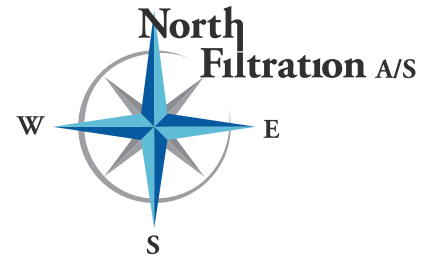

2,0/2,2
Decitex



0,56
mm



0,056
%



250
gram



MD 512,4 N/5cm Length
CD 518,3 N/5cm cross

FILTER MEDIA DATA

SEW 152 is a 100% Aluminium coated spun bond filters media that is manufactures from continuous fibre who does not permit the particles to become embedded.
SEW 152 is very rugged and have a high burst strength , and are used in very static and abrasive loaded Environments
Antistatic 100 % Spun bond media makes pulse cleaning easier and are running with lower pressure drop SEW 152 is a washable filter media. (Limited)



Dry
Trocken 120 Celsius

Wet
Feuchte 90 Celsius

Air Permeability | 200Pa
Luftdurchlässigkeit | 200Pa 320 m3/m2/hr

Chemical Resistance | Chemische Eigenschaften

	Excellent Sehr Gut	Good Gut	Fair Mässig
Oil/water resistance Öl und Wasserabweisend	X	X	X
Hydrolysis resistance Hydrolysebeständigkeit	X	X	X
Acid resistance Säurebeständigkeit	X	X	X
Alkaline resistance Alkalienbeständigkeit	X	X	X



Certificate No.
TV1022F
21112971

Phone +45 5460 2080

S.E.W. North Filtration A/S * Vesterbrogade1, Section C * DK-4930 Maribo
E-mail: sales@northfiltration.com * www.northfiltration.com * VAT no.: DK 33 49 28 71